

K224GDR/SDR/SDF Refrigerators & Freezer

USES: / CLINICAL APPLICATIONS / VACCINES & MEDICATIONS / BIOLOGICS / DIAGNOSTICS KITS / MOLECULAR BIOLOGY / INDUSTRIAL TESTING


K2 Scientific's 24 cu. ft. refrigerators and freezer are perfect for storing vaccines. Engineered with precision, these refrigerators are meticulously crafted to optimize space utilization without compromising on performance. These refrigerators provide the ideal solution for maintaining the integrity and effectiveness of your temperature-sensitive materials.



K224GDR



K224SDR

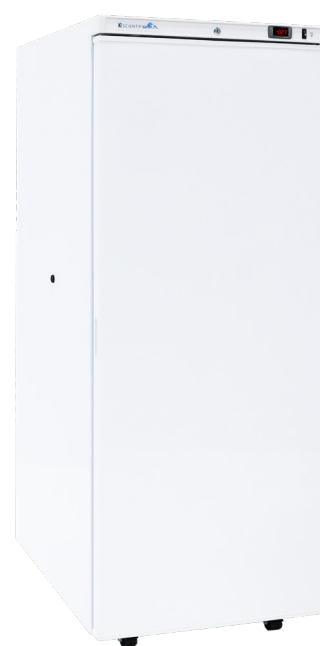

K224SDF

- Intelligent microprocessor controller with digital display and adjustable temperature control
- Audible and visual high or low temperature alarms
- Magnetically sealed door with rapid cool-down mode after door opening
- Efficient, exterior, switch-activated interior LED lighting
- 0.5" temperature probe and data logger access port

- Static (cycle) defrost
- Six white epoxy-coated wire shelves standard
- Keyed door lock
- Forced air circulation aids temperature stability and uniformity
- Shelves are adjustable by 1-inch increments
- Cabinet constructed of white powder-coated steel with CFC-free, high density insulation

- Remote alarm contacts
- Easy swivel casters
- An environmentally green, compliant with future EPA and SNAP mandates
- Built and shipped from ISO 9001:2015 manufacturing and distribution facilities
- Three quality control checks prior to shipping
- Warranty: Two-year parts, labor, or full replacement

MODEL NUMBER	CAPACITY CU. FT.	EXTERIOR Depth x Width x Height	INTERIOR Depth x Width x Height	TEMP RANGE (SETPOINT)	DOORS	SHELVES	DEFROST	SHIPPING WT. LBS.
K224GDR/SDR	24	35.50"/33.94" x 29.13" x 77.56"	26.39" x 24.02" x 67.32"	+2°C to +8°C (+4°C)	1	6	STATIC (CYCLE)	311/296 lbs
K224SDF	24	33.94" x 29.13" x 77.56"	26.39" x 24.02" x 67.32"	-10°C to -30°C (-20°C)	1	6	MANUAL	296 lbs

Model #	K224GDR/SDR	K224SDF
Storage Volume	24 cubic feet	24 cubic feet
Specifications		
Exterior (D x W x H)	35.50"/33.94" x 29.13" x 77.56"	33.94" x 29.13" x 77.56"
Interior (D x W x H)	26.39" x 24.02" x 67.32"	26.39" x 24.02" x 67.32"
Insulation	CFC-free, high density insulation	CFC-free, high density insulation
Doors	1, right-hand swing	1, right-hand swing
Shelves	6	6
Access Port	0.5" probe port	0.5" probe port
Casters	Standard	Standard
Shipping Weight	311/296 lbs	296 lbs
Certifications & Compliances	ISO: 9001:2015, CDC and VFC Compliant, EPA and SNAP Compliant	ISO: 9001:2015, CDC and VFC Compliant, EPA and SNAP Compliant
Performance		
Stability	+/- 2°C to 3°C	+/- 2°C to 3°C
Adjustable Set Point Range	+2°C to +8°C	-10°C to -30°C
Factory Set Point	+4°C	-20°C
Electrical Power/Current	120v 60 Hz 15 Amp	120v 60 Hz 15 Amp
Power Plug	NEMA 5-15	NEMA 5-15
Indoor/Outdoor Use	Indoor use only	Indoor use only
Application Environment	Non-corrosive, non-flammable, non-explosive	Non-corrosive, non-flammable, non-explosive
Ambient Operating Temp	20°C to 32°C	20°C to 32°C
Refrigeration		
Refrigeration System	Vapor compression system, forced-air	Vapor compression system
Compressor	Hemetically sealed compressor	Hemetically sealed compressor
Condenser Type	Foamed in	Foamed in
Expansion Device	Capillary tube	Capillary tube
Evaporator Type	Forced-air	Cold wall evaporator
Defrost	Static (cycle)	Manual
Refrigerant	R290 (Propane)	R290 (Propane)
Controller/System Configuration		
User Interface	Microprocessor with digital display	Microprocessor with digital display
Power Switch	Plug & Play	Plug & Play
Controller Type	Digital Controller	Digital Controller
Security	Keyed lockable doors	Keyed lockable doors
Control Sensor	NTC probe	NTC probe
Remote Alarm Terminals	Standard	Standard
High/Low Alarms	Standard	Standard
Power Failure Alarm	Standard	Standard
Door Ajar Alarm	Standard	Standard
Warranty	Two-year parts, labor, or full replacement	Two-year parts, labor, or full replacement